



THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF MICROSTRAIN INC. AND SHALL NOT BE REPRODUCED WITHOUT PERMISSION FROM MICROSTRAIN INC.



ACTUAL SIZE

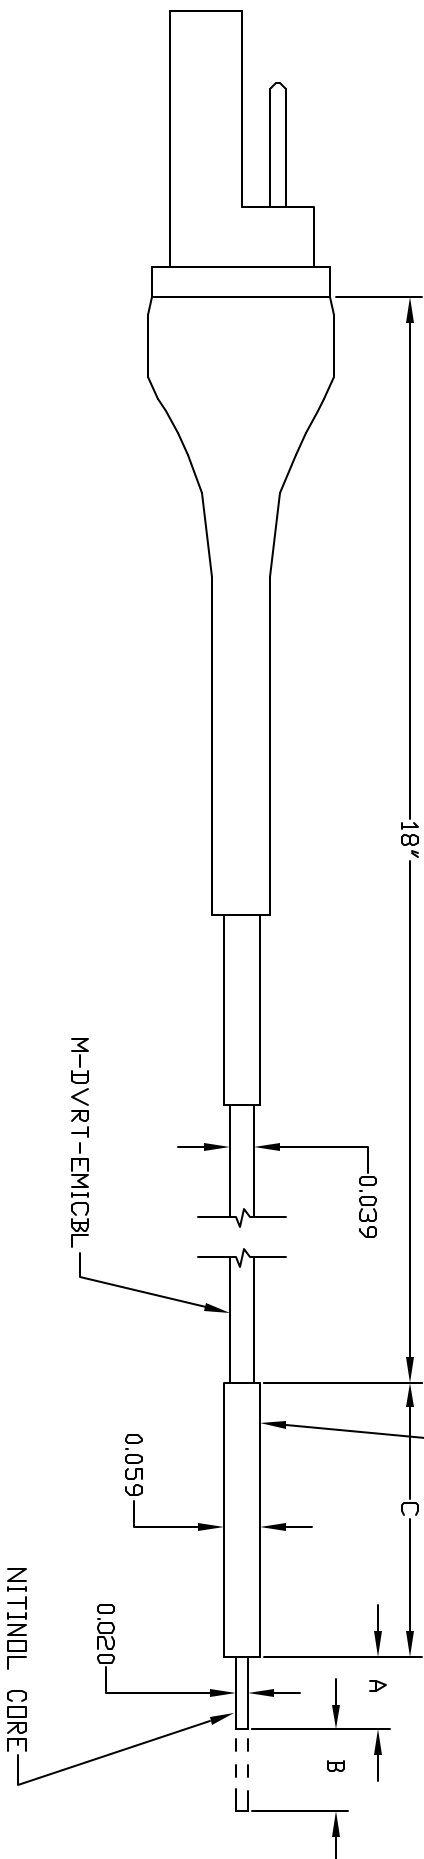


STROKE LENGTH	< B >	< C > OVERALL LENGTH
0.118 (3)		0.445 (11.3)
0.236 (6)		0.736 (18.7)
0.354 (9)		1.055 (26.8)

"A" DIMENSION IS CUSTOMER SPECIFIED  
M-DVRT-EMICBL IS A TEFLON COATED CABLE WITH SHIELD. THE THREE CONDUCTORS ARE WRAPPED AROUND A STAINLESS STEEL WIRE FOR INCREASED TENSILE STRENGTH.

REVISIONS 1000-0002			
REV	DESCRIPTION	DATE	APVD
A	CHANGE TABLE "UPDATE"	10/13/00	
B	REDRAW	01/09/02	

UNLESS OTHERWISE SPECIFIED, DIMS. ARE IN INCHES. TOLERANCES (UNLESS OTHERWISE SPECIFIED): FRACTIONS: +/ - 1/64 DECIMALS: +/ - 0.01 ANGLES: +/ - 0.005 SURFACE FINISH: 63 MICRORINCHES	DATE 4/10/00
DRAWN BY S. Munnell	
CHK BY	
APVD BY	
APVD BY	
APVD BY	

 <b>Microstrain</b>		
TITLE M-DVRT-X		
SIZE A	DRAWING NO. 1000-0002	REV B
SCALE 3:1	SHEET 1 OF 1	