



THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF MICROSTRAIN INC. AND SHALL NOT BE REPRODUCED WITHOUT PERMISSION FROM MICROSTRAIN INC.

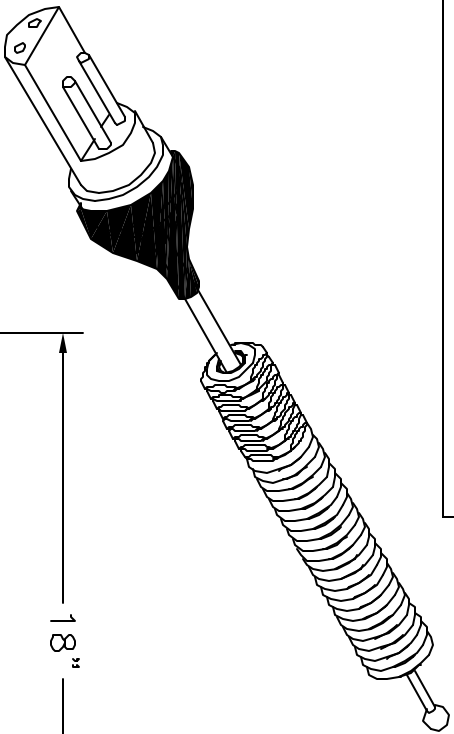

REVISIONS		1005-0006		
ZONE	REV	DESCRIPTION	DATE	APPROVED
	-			

SAPPHIRE BEARING GUIDED,
 SPRING LOADED CORE.
 COMPRESSES "X" MM
 (LINEAR STROKE)

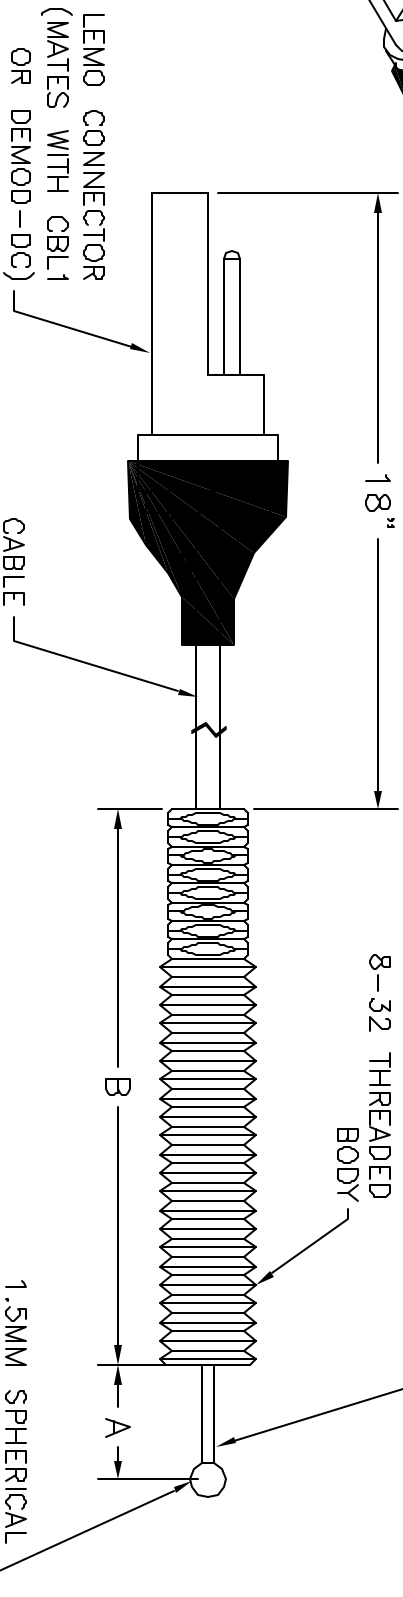

LINEAR STROKE "X"	SENSOR LENGTH "B"	MAXIMUM TRAVEL "A"
0.118 (3)	0.94 (24)	0.16 (4)
0.236 (6)	1.55 (39.4)	0.28 (7)
0.354 (9)	1.95 (49.8)	0.39 (10)

SENSOR CABLE IS SHIELDED AND TEFLON COATED EACH CONDUCTOR IS WRAPPED AROUND A STAINLESS STEEL WIRE FOR INCREASED TENSILE STRENGTH.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES. TOLERANCES (UNOS) FRACTIONS: +/-1/64 DECIMALS: .XX +/- .01 .XXX +/- .005 ANGLES: +/- 0.5 DEGREES SURFACE FINISH: 63 MICRONS

MicroStrain[®]
 294 N. Winooski Ave.
 Burlington, VT
 (P) 802-862-6629

TITLE
MG-TBODY-X WITH MG-DVRT-X

DRAWN BY: SP/ SWM
 APPROVED BY:

SIZE: **A**
 CAGE CODE: **0XYZ9**
 SCALE: **3:1**

DWG NO.: **1005-0006**
 DATE: **30 AUGUST 2002**
 SHEET: **1 OF 1**

REV: **-**