


THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF MICROSTRAIN INC. AND SHALL NOT BE REPRODUCED WITHOUT PERMISSION FROM MICROSTRAIN INC.

REVISIONS 2004-0001			
REV	DESCRIPTION	DATE	APVD
A	CHANGE CABLE AND LENGTH	10/28/00	
B	UPDATE PRINT	12/12/01	

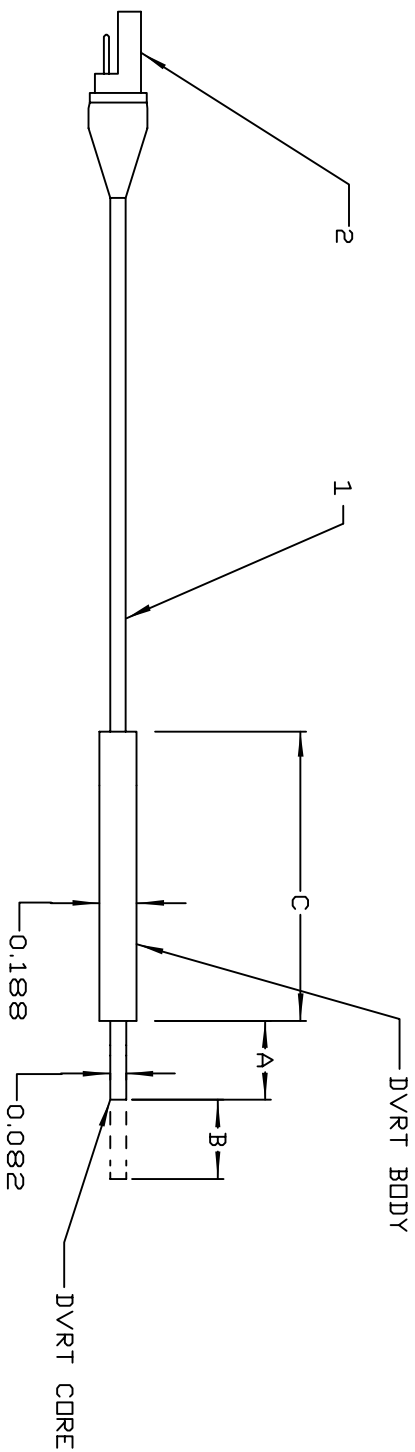


<B> STROKE LENGTH 0.019 <0.5>	<C> OVERALL LENGTH 1.358 <34.5>
-------------------------------------	---------------------------------------

- "A" DIMENSION IS CUSTOMER SPECIFIED (13 mm TYP.)
- SHIELDED TEFLON CABLE (18" LONG TYP)
  - LEMDO CONNECTOR, MATES WITH CBL1 AND DEMOD-DEM.

SENSOR SPECIFICATIONS:  
 RESOLUTION: 65 NANOMETERS  
 STROKE: +/- 250 MICROMETERS  
 BANDWIDTH: -3dB AT 80HZ

UNLESS OTHERWISE SPECIFIED, DIMS. ARE IN INCHES. TOLERANCES (UNLESS FRACTIONS):  
 +/- 1/64  
 DECIMALS:  
 .XX = +/- 0.01  
 .XXX = +/- 0.005  
 ANGLES +/- 0.5 deg  
 SURFACE FINISH:  
 63 MICRORINCHES

DATE	9/16/96
DRAWN BY	S. MUNDSELL
CHK BY	
APVD BY	APVD BY
APVD BY	APVD BY
APVD BY	APVD BY

 <b>Microstrain</b>	
TITLE NAND-DVRT-0.5	
SIZE	FSCM
A	
DRAWING NO. 2004-0001	
SCALE 1 : 1	SHEET 1 OF 1
REV	B