
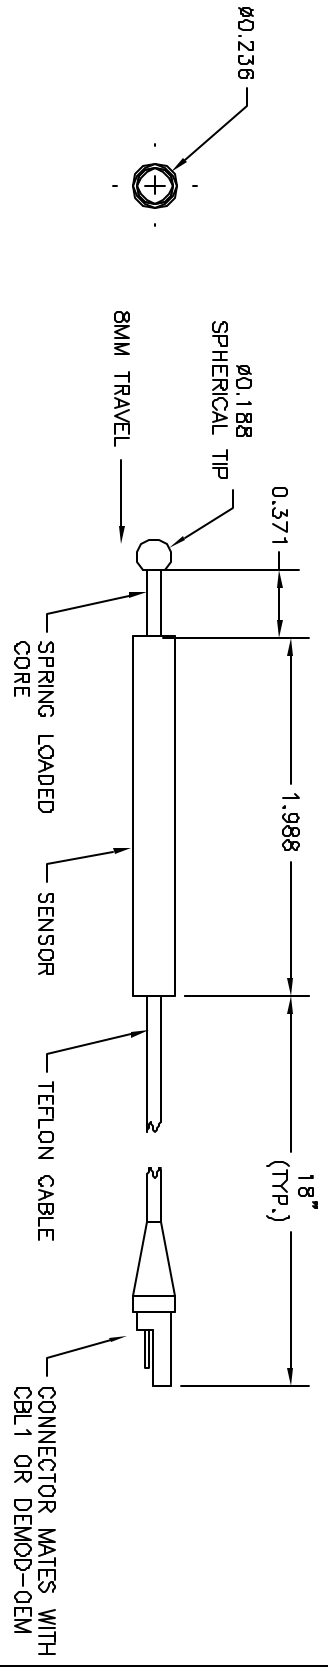


THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF MICROSTRAIN INC. AND SHALL NOT BE REPRODUCED WITHOUT PERMISSION FROM MICROSTRAIN INC.

| REVISIONS | | | 2015-0001 |
|-----------|-----|-------------|-----------|
| ZONE | REV | DESCRIPTION | DATE |
| | | | |
| | | | |

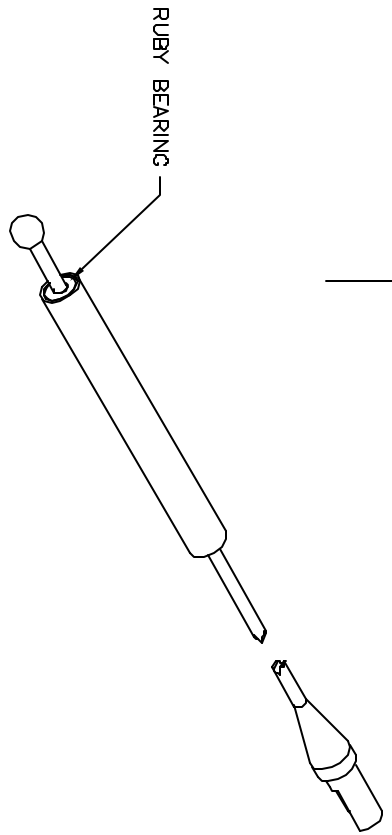

- NOTES:
1. STANDARD SPRING RATE OF 1.4 LBF/IN (0.245 N/MM).
 2. TYPICAL PRE LOAD OF 0.056 POUNDS (0.0245 N)
 3. SENSOR WEIGHT = 0.27 OUNCES (7.7 GRAMS)
 4. CORE WEIGHT = 0.026 OUNCES (750 MILLIGRAMS).
 5. SENSOR IS MAGNETICALLY SHIELDED (416 S.S. SHELL)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES.
 TOLERANCES (UNOS)
 FRACTIONS: +/-1/64
 DECIMALS: .XX +/-01
 ANGLES: +/-0.5 DEGREES
 SURFACE FINISH: 63 MICRONS

DRAWN BY: Steven Mundell

APPROVED BY:

MicroStrain © 310 Hurricane Lane, #4
 Williston, VT 05495
 (P) 802-862-6629

TITLE
SG-DVRT-8

| | | | |
|------|-----------|-----------|-----|
| SIZE | CAGE CODE | DWG NO. | REV |
| A | 0XYZ9 | 2015-0001 | - |

| | | |
|-------|-------------|--------|
| SCALE | DATE | SHEET |
| 1:1 | 23 JAN 2003 | 1 OF 1 |