
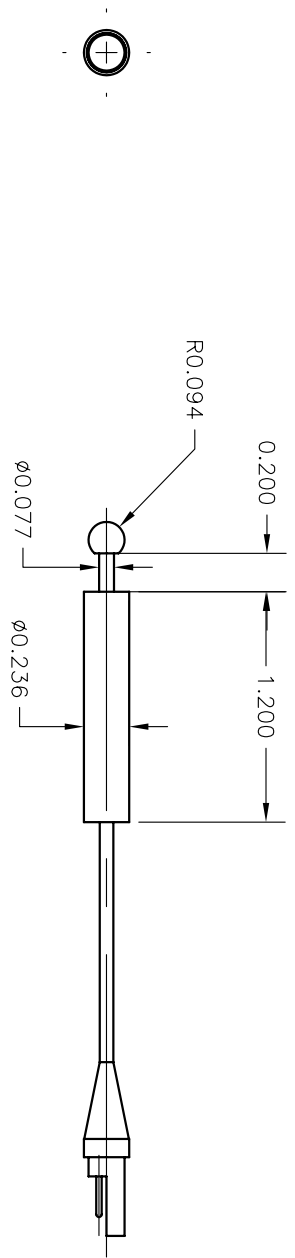


THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF MICROSTRAIN INC. AND SHALL NOT BE REPRODUCED WITHOUT PERMISSION FROM MICROSTRAIN INC.

REVISIONS		2015-0002		
ZONE	REV	DESCRIPTION	DATE	APPROVED

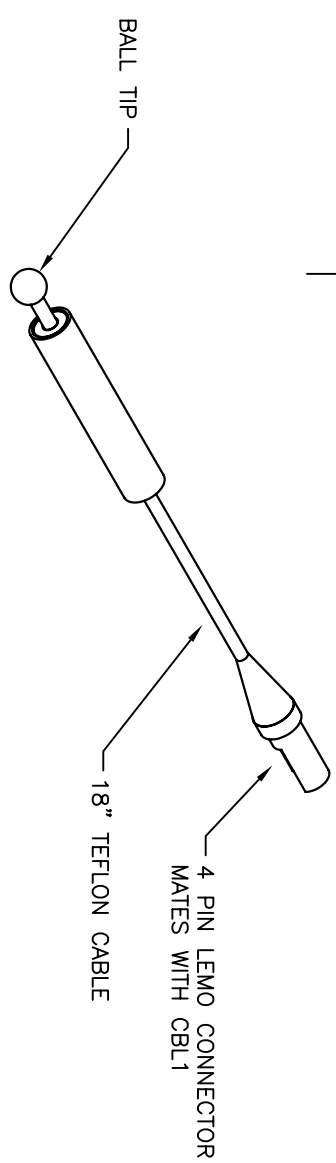

- NOTES:
1. STANDARD SPRING RATE OF 1.4 lb/IN.
 2. TYPICAL PRE LOAD OF 0.04 POUNDS (0.0175 N)
 2. SENSOR WEIGHT = 0.27 OUNCES (7.7 GRAMS)
 4. CORE WEIGHT = 0.028 OUNCES (750 MILLIGRAMS).
 5. SENSOR IS MAGNETICALLY SHIELDED (416 S.S. SHELL)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES.
 TOLERANCES (UOS)
 FRACTIONS: $\pm 1/64$
 DECIMALS: .XX ± 0.01
 .XXX ± 0.005
 ANGLES: ± 0.5 DEGREES
 SURFACE FINISH: 63 MICRONS

DRAWN BY: Steven Mundell
 APPROVED BY:

MicroStrain[®] 310 Hurricane Lane, #4
 Williston, VT 05495
 (P) 802-862-6629

TITLE
SG-DVRT-4

SIZE	CAGE CODE	DWG NO.	REV
A	0XYZ9	2015-0002	-
SCALE	DATE	SHEET	
1:1	23 JAN 2003	1 OF 1	