



THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF MICROSTRAIN INC. AND SHALL NOT BE REPRODUCED WITHOUT PERMISSION FROM MICROSTRAIN INC.

REVISIONS		2015-0004		
ZONE	REV	DESCRIPTION	DATE	APPROVED
A		CHANGE SHELL DIAMETER FROM .275 TO .236	12/27/05	S. MUNDELL

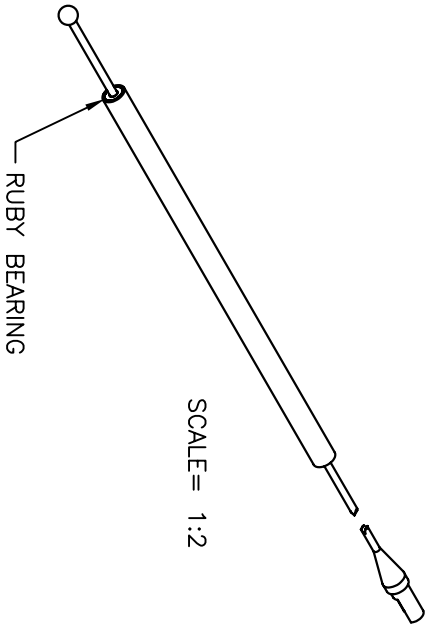

SCALE = 1:2

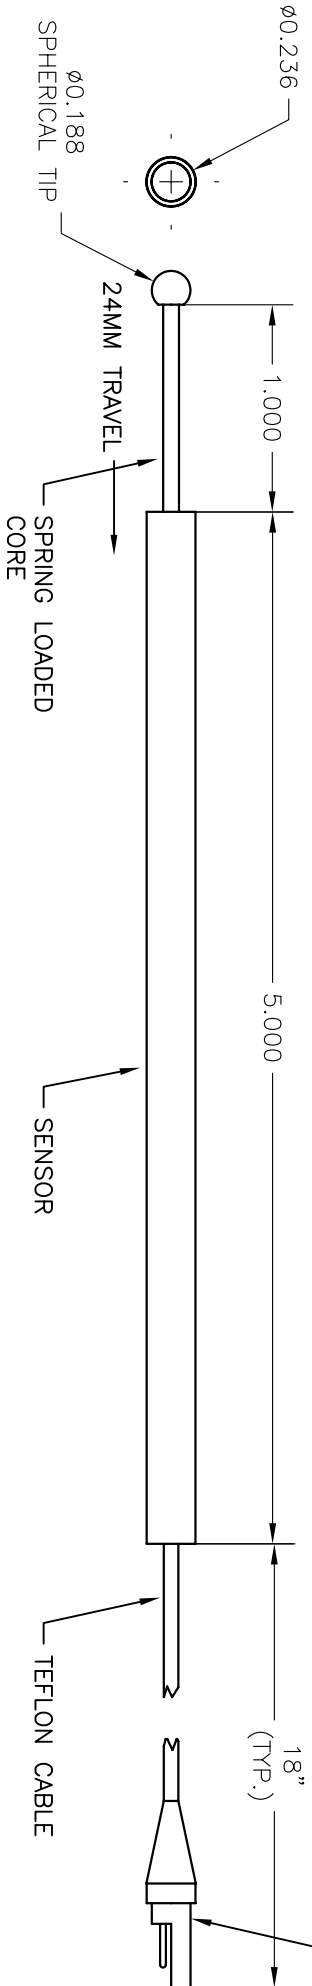

CONNECTOR MATES WITH CBL1 OR DEMOD-OEM

- NOTES:
1. STANDARD SPRING RATE OF 1.0 LBF/IN (0.175 N/MM) SPRING #A10-15.
  2. TYPICAL PRE LOAD OF 0.04 POUNDS (0.0175 N) SENSOR WEIGHT = 0.81 OUNCES (23.1 GRAMS)
  3. CORE WEIGHT = 0.075 OUNCES (2.5 GRAMS).
  4. SENSOR IS MAGNETICALLY SHIELDED (416 S.S. SHELL)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES. TOLERANCES (I/O) FRACTIONS:  $\pm 1/64$  DECIMALS: .XX  $\pm .01$  .XXX  $\pm .005$  ANGLES:  $\pm 0.5$  DEGREES SURFACE FINISH: 63 MICRONS

**MicroStrain**<sup>®</sup> 310 Hurricane Lane, #4  
Williston, VT 05495  
(P) 802-862-6629

TITLE: SG-DVRT-24

DRAWN BY: Steven Mundell	SIZE: A	CAGE CODE: 0XYZ9	DWG NO.: 2015-0004	REV: A
APPROVED BY:	SCALE: 1:1	DATE: 9 APRIL 2003	SHEET: 1 OF 1	