
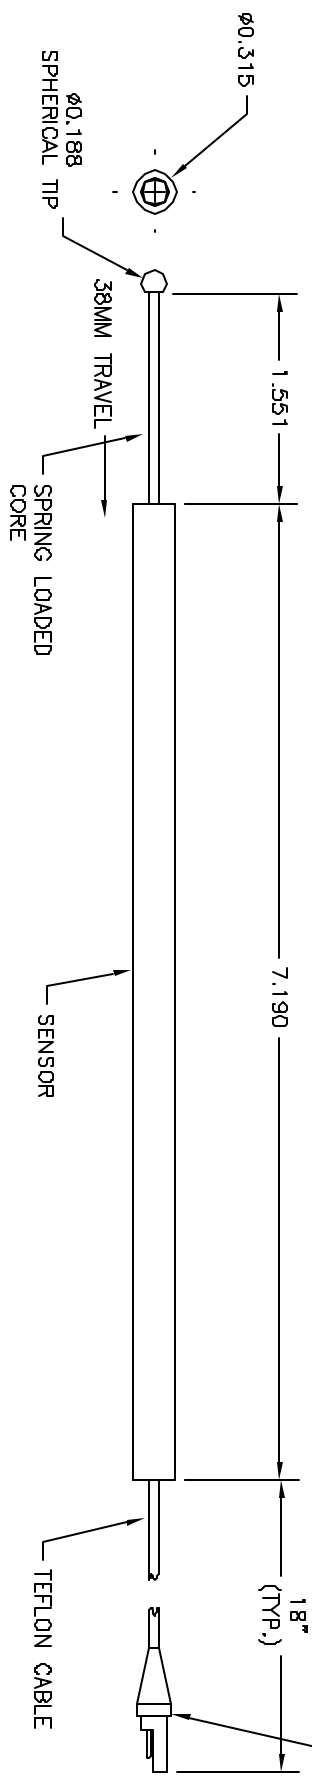


THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF MICROSTRAIN INC. AND SHALL NOT BE REPRODUCED WITHOUT PERMISSION FROM MICROSTRAIN INC.

REVISIONS		2015-0005		
ZONE	REV	DESCRIPTION	DATE	APPROVED

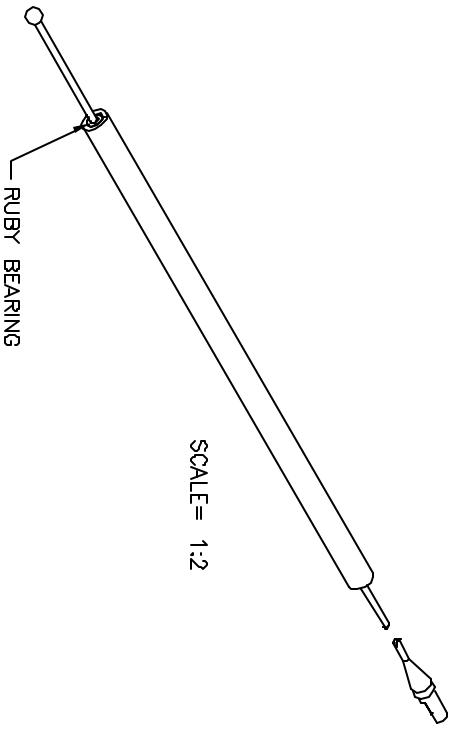


- NOTES:
1. STANDARD SPRING RATE OF 0.5 LBF/IN (0.0875 N/MM) SPRING #B15-44 CUT TO 2.1"
 2. TYPICAL PRE LOAD OF 0.04 POUNDS (0.0175 N)
 3. SENSOR WEIGHT = 1.08 OUNCES (30.7 GRAMS)
 4. CORE WEIGHT = 0.1 OUNCES (45 GRAMS).
 5. SENSOR IS MAGNETICALLY SHIELDED (416 S.S. SHELL)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES.
 TOLERANCES (DGS)
 FRACTIONS: +/-1/64
 DECIMALS: .XX +/-01
 ANGLES: .XXX +/-005
 SURFACE FINISH: 63 MICRONS

DRAWN BY: Steven Mundell

APPROVED BY:


MicroStrain © 310 Hurricane Lane, #4
 Williston, VT 05495
 (P) 802-862-6629

TITLE
SG-DVRT-38

SIZE	CAGE CODE	DWG NO.	REV
A	0XYZ9	2015-0005	-
SCALE	DATE	SHEET	
3:4	9 APRIL 2003	1 OF 1	