THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF MICROSTRAIN INC. AND SHALL NOT BE REPRODUCED WITHOUT PERMISSION FROM MICROSTRAIN INC.

REVISIONS		3017-0030	
REV	DESCRIPTION	DATE	APPROVED
_	-	-	_
_	-	_	-

JP5 PIN-OUTS:

1 = +V

2 = TXD

3 = RXD

4 = GND

5 = ANALOG OUT 1

6 = ANALOG OUT 2

7 = ANALOG OUT 3


8 = ANALOG OUT 4

9 = DIGITAL I/O 1

10 = DIGITAL I/O 2

11 = DIGITAL I/O 3

12 = DIGITAL I/O 4

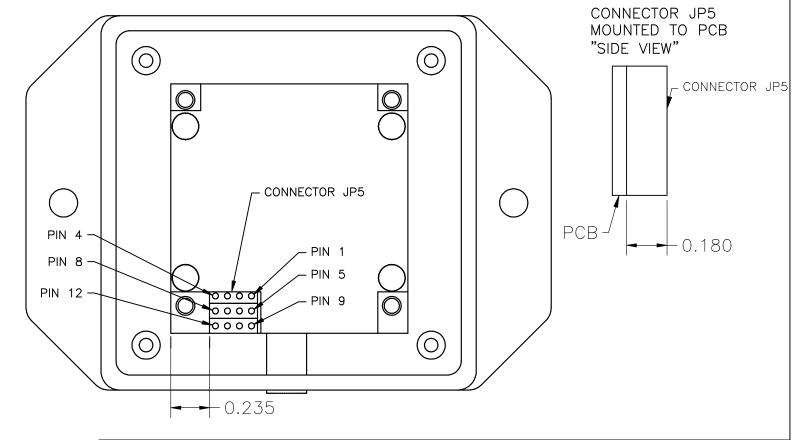

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES. **TOLERANCES (UOS):** $X = \pm .02$; $XX = \pm .01$; $XXX = \pm .005$ HOLE DIAMETERS: ±.002; ANGLES: ±0.5° SURFACE FINISH: 63 MICROINCHES MATERIAL:

MicroStrain Williston, VT 05495

3DM-GX1 I/O PIN-OUTS

DESIGNED BY: DRAWN BY: S. PENDO S. PENDO CHECKED BY: APPROVED BY: X S. PENDO

SIZE CAGE CODE OXYZ9

 $\frac{1}{1}$ DWG NO. $\frac{1}{3}$ $\frac{1}{1}$ $\frac{1}{1$

REV

SCALE 1.5:1 DATE: 9/1/04 SHEET 1 OF 1