



2

1

REV	DESCRIPTION	DATE	APPROVED

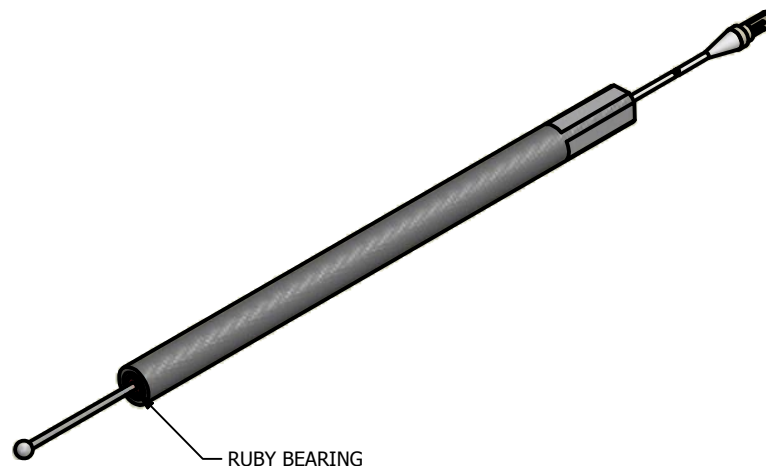

RUBY BEARING

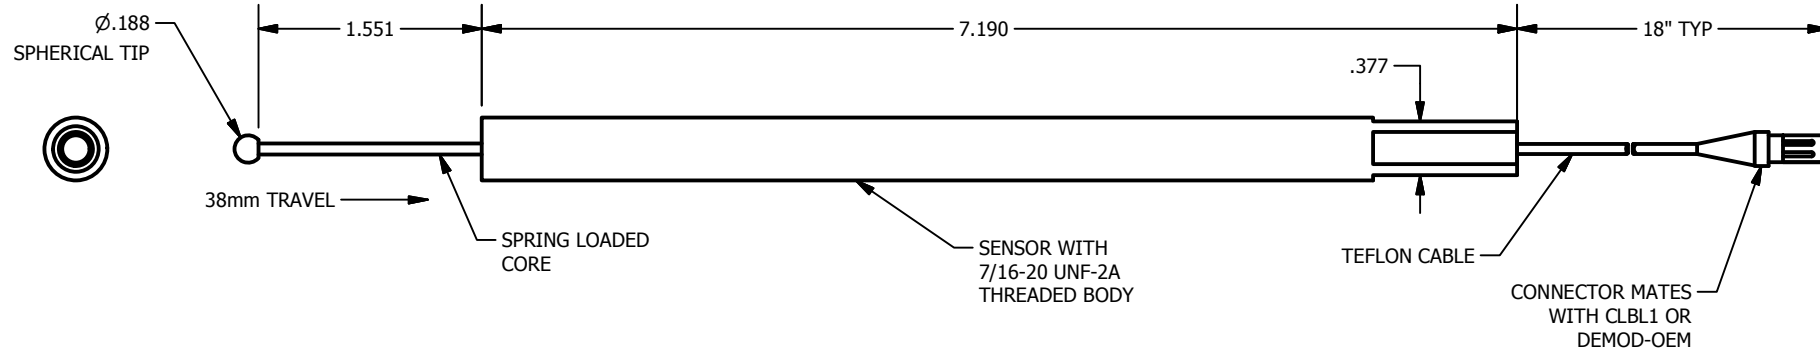

NOTES:

1. STANDARD SPRING RATE OF 0.33 LB/IN. (0.06 N m)
SPRING #B15-44 CUT TO 2.1"
2. TYPICAL PRELOAD OF 0.04 POUNDS (0.0175 N)
3. SENSOR WEIGHT = 1.08 OUNCES (30.7 GRAMS)
4. SENSOR IS MAGNETICALLY SHIELDED (416 S.S. SHELL)

UNLESS OTHERWISE SPECIFIED ALL
 DIMENSIONS ARE IN INCHES.
 TOLERANCES:(UOS):
 .X = $\pm .02$; .XX = $\pm .01$; .XXX = $\pm .005$
 HOLE DIAMETERS: $\pm .002$; ANGLES: $\pm 0.5^\circ$
 SURFACE FINISH: 63 MICROINCHES
 MATERIAL:



MicroStrain®

310 Hurricane Lane, Suite 4
 Williston, VT 05495
 802-862-6629

TITLE

THREADED BODY SG-DVRT-38

THIS DRAWING AND SPECIFICATIONS ARE
 THE PROPERTY OF MICROSTRAIN INC. AND
 SHALL NOT BE PRODUCED WITHOUT
 PERMISSION FROM MICROSTRAIN INC.

DESIGNED BY:
 C.THELEN

DRAWN BY:

CHECKED BY:

APPROVED BY:

SIZE

A

CAGE CODE

OXYZ9

DWG NO:

6108-0300

REV

-

SCALE 4:1

DATE: 2/7/2014

SHEET 1 OF 1

2

1