

SD-834519019

2 ECN NO. UMI 41.74

3 DATE 9-21-10

4 PART/DWG REV ISSUE

5


6

7

8

9

10

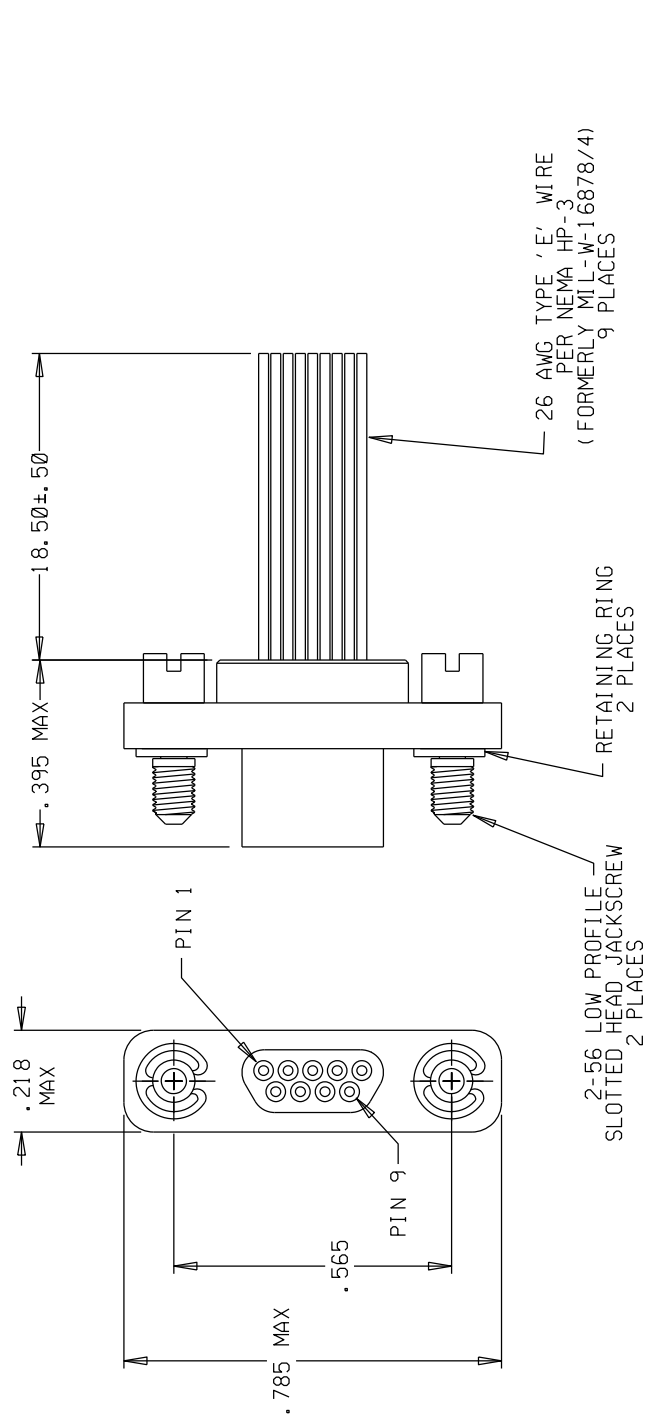

SCALE: NONE	DWG SIZE: B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
DRAWN BY & DATE: DW 9-21-10	CHECKED BY & DATE:	TITLE: MICRO-D CABLE ASSY, PLASTIC SIZE 9 LOW PROFILE PLUG, PR09P05-26E5-1.8.0 SPL	
APPROVED BY & DATE:	CAD FILENAME: SD-834519019.DGN	MATERIAL: Uti-Mate Connector Inc.	
UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	GENERAL TOLERANCES: 3 PLACE ±.005, 2 PLACE ±.01, ANGULAR ±2°	Uti-Mate Connector Inc.	
QUALITY SYMBOLS: MAJOR (triangle with M), CRITICAL (triangle with C), SPC (triangle with S)	Uti-Mate CAGE CODE: 58967	PART NO.: 834519019	DRAWING NO.: SD-834519019
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	
		SHEET NO.: 1 OF 1	
		REV: -	

MATERIALS:
 BODY/INSULATOR: PPS PER MIL-M-24519 GST-40F
 PIN CONTACTS: BERYLLIUM COPPER PER ASTM-B194,
 GOLD PLATED PER ASTM B488-01
 JACKSCREW: 303 STAINLESS STEEL, PASSIVATED PER AMS 2700, ANNEALLED
 AFTER MACHINING TO INSURE LOW MAGNETING PERMEABILITY
 RETAINING RING: C17200 BERYLLIUM COPPER
 1. MARKING: "UMI", UMI PART NO., AND DATE CODE
 NOTES: UNLESS OTHERWISE SPECIFIED.

2