


| REV | DESCRIPTION | DATE | APPROVED |
|-----|---------------------------------------|---------|----------|
| 001 | UPDATE PINOUT ON DRAWING (REMOVE 1-6) | 3/20/09 | D O'NEIL |

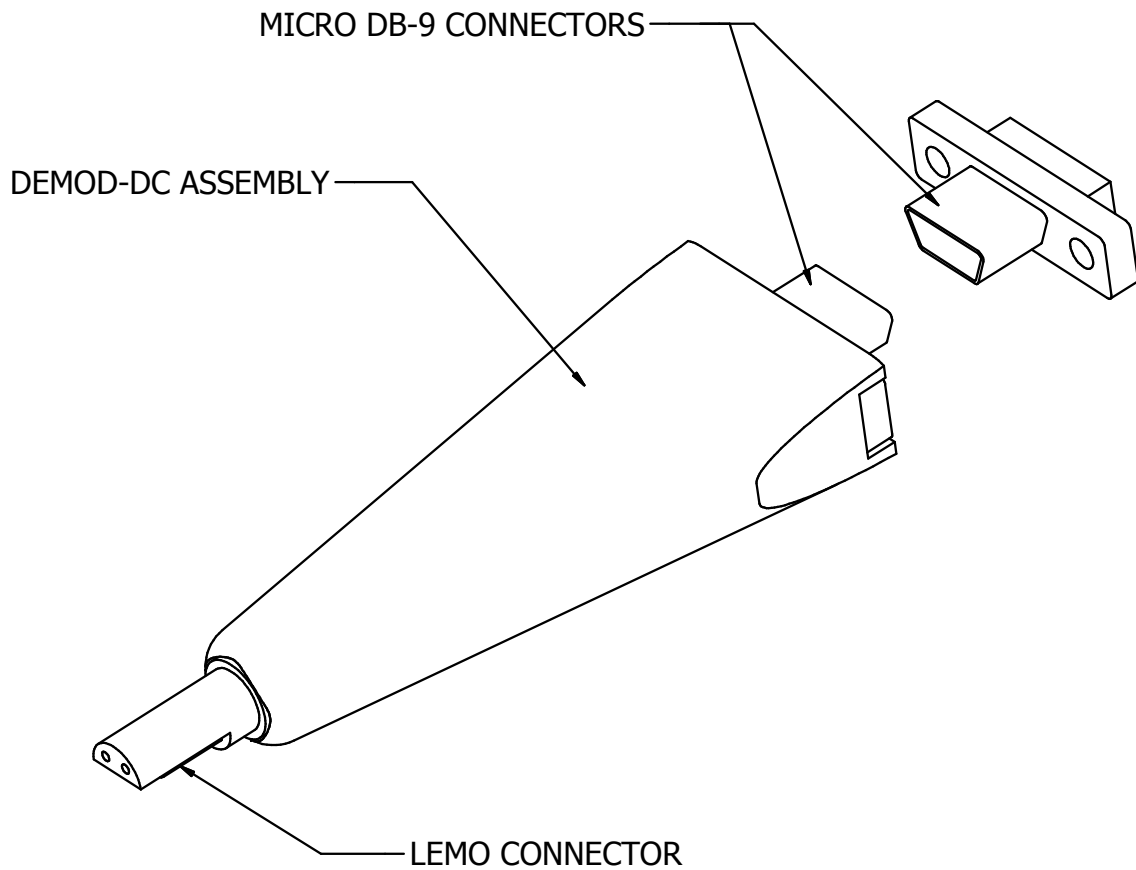

MICRO DB-9 WIRING:

| | | |
|-------|-------|---------------|
| PIN 7 | BLACK | GROUND |
| PIN 8 | WHITE | OUTPUT 0-5VDC |
| PIN 9 | RED | INPUT 6-16VDC |

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES.
 TOLERANCES:(UOS):
 .X = ± .02; .XX = ± .01; .XXX = ± .005
 HOLE DIAMETERS: ± .002; ANGLES: ± 0.5°
 SURFACE FINISH: 63 MICROINCHES
 MATERIAL:
 FINISH:

MicroStrain®

459 Hurricane Lane, Suite 102
 Williston, VT 05495
 802-862-6629

TITLE
 DEMOD-DC2 MICRO DB-9 ASSEMBLY

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF MICROSTRAIN INC. AND SHALL NOT BE PRODUCED WITHOUT PERMISSION FROM MICROSTRAIN INC.

DESIGNED BY:
 D O'NEIL

DRAWN BY:
 D O'Neil

SIZE
 A

CAGE CODE
 OXYZ9

DWG NO:
 3029-0002

REV
 002

CHECKED BY:
 D O'NEIL

APPROVED BY:
 B TRUTOR

SCALE 2:1

DATE: 3/20/2009

SHEET 1 OF 1