


DVRT-Link™ -LXRS™

Wireless Displacement Node

The DVRT-Link™-LXRS™ Wireless Displacement Node supports a wide range of inductive displacement transducers including all of the LORD MicroStrain® DVRT® sensors. DVRT-Link™-LXRS™ combines LORD MicroStrain®'s DEMOD-DC® signal conditioner, its wireless technologies and an internal rechargeable battery to allow remote, long term monitoring of microminature displacement measurements. The node can simultaneously log data to internal memory and/or transmit real-time data to a host computer at user programmable data rates up to 4096 Hz. Node Commander® software supports configuration of the wireless node including discovery, initialization, radio frequency, sample rate, reading/writing to node EEPROM, calibrating node sensors, managing node batteries including sleep, wake, and cycle power, and upgrading node firmware. The DVRT-Link™-LXRS™ is compatible with any WSDA® -Base, WSDA® -1000 or SensorCloud™.

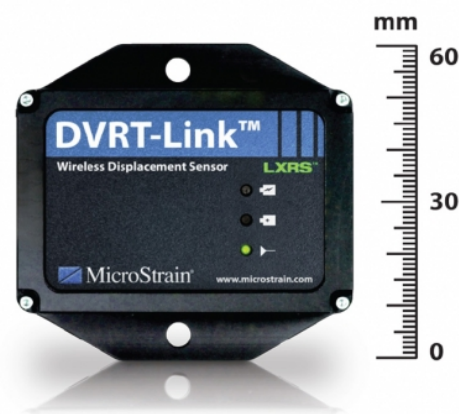

Features & Benefits

High Performance

- Quick wireless deployment of LORD MicroStrain® DVRT® sensors
- Scalable, ultra-long-range wireless sensor network
- Lossless data throughput under most operating conditions
- Low-power for extended battery life
- SensorCloud – integrated web solution

Ease of Integration

- Rapidly deployable wireless form factor
- Simple integration supported by comprehensive SDK

Cost Effective


- Reduced cost and rapid time to market for customer's applications
- Aggressive volume discount schedule

Applications

- Robotics and machine control
- Linear/angular positioning of optical components
- Quality control
- Production Process Monitoring
- Structural load and stress monitoring

System Overview

At the heart of LORD MicroStrain®'s LXRS™ Lossless Data Wireless Sensor Networks are WSDA® gateways, which use our exclusive beaconing protocols to synchronize precision timekeepers within each sensor node in the network. The WSDA® also coordinates data collection from all sensor nodes. Users can easily program each node on the scalable network for simultaneous, periodic, burst, or data logging mode sampling with our Node Commander® software, which automatically configures radio communication to maximize the aggregate sample rate. Optional SensorCloud™ enabled WSDA® support autonomous web-based data aggregation.

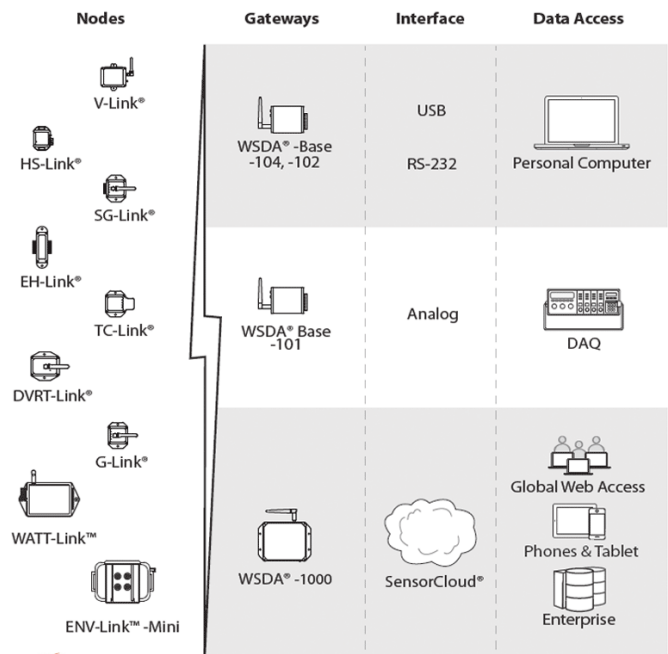

Wireless Sensor Network (WSN)

Specifications

Input channels	1 inductive (DVRT® displacement transducer), and internal temperature sensor
Temperature sensor	-40 °C to 70 °C range, typical accuracy ± 2 °C (at 25 °C)
Signal to noise ratio	1,000 : 1 typical (factory calibrated with DVRT® sensor)
Excitation	regulated sinewave, 150 kHz standard; other frequencies available on request
Low pass filter	800 Hz standard; factory adjustable 10 Hz – 20 kHz
Analog to digital (A/D) converter	successive approximation type, 12 bit resolution
Data storage capacity	2 megabytes (approximately 1,000,000 data points)
Sampling modes	synchronized, armed datalogging, streaming, low duty cycle
Synchronized sampling rates	1 Hz - 512 Hz
Synchronized sampling mode network capacity	transmit real time data from node to PC - rate depends on number of active channels and transmitting nodes. e.g.: 3 nodes, 1 channel, 512 Hz 15 nodes, 1 channel, 256 Hz 31 nodes, 1 channel, 128 Hz 63 nodes, 1 channel, 64 Hz 127 nodes, 1 channel, 32 Hz sample rates and # of channels are easily configured within Node Commander® Network Configuration Wizard
Synchronization between nodes	± 32 μ sec with 10 second beacon interval
Synchronization rate stability	± 3 ppm
Armed datalogging sampling rates	1 channel enabled: 32 Hz to 4096 Hz; 2 or more channels enabled: 32 Hz to 2048 Hz
Streaming sampling rates	1 channel enabled: 736 Hz; 2 channels enabled: 679 Hz per channel
Low duty cycle sampling rates	512 Hz to 1 sample per 60 minutes
Sensor event driven trigger	commence datalogging when threshold exceeded
Radio frequency (RF) transceiver carrier	2.4 GHz direct sequence spread spectrum, license free worldwide (2.405 to 2.480 GHz) – 16 channels, radiated power programmable from 0 dBm (1 mW) to 16 dBm (39 mW); European models limited to 10 dBm (10 mW)
RF data packet standard	IEEE 802.15.4, open communication architecture
RF data downloading	8 minutes to download full memory
Range for bi-directional RF link	programmable communication range from 70 meters to 2 kilometers
Status LEDs	AC power, battery charged, node activity
Power	internal: 3.7 volt 250 mAh lithium polymer rechargeable battery; external: +3.2 to +9.0 VDC
Power consumption	25 mA at idle
Operating temperature	-20 °C to +60 °C with standard internal battery and enclosure, extended temperature range optional with custom battery and enclosure, -40 °C to +85 °C for electronics only
Warm-up time	30 seconds recommended
Maximum acceleration limit	500 g standard (high g option available)
Dimensions	61 mm x 61 mm x 27 mm without antenna
Weight	58 grams
Enclosure material	ABS plastic
ROHS	compliant
Compatible base stations	all WSDA®-Base and WSDA®-1000
Software	Node Commander® Windows XP/Vista/7 compatible
Software development kit (SDK)	includes data communications protocol, EEPROM maps and sample code (OS and computing platform independent)
FCC ID	XJQMSLINK0001
IC ID	8505A-MSLINK0001

